TOP DRAIN LINES

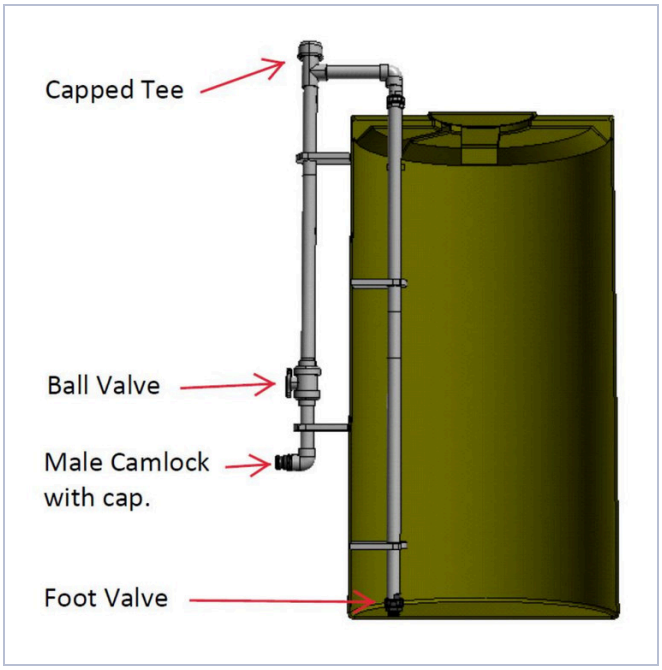

Top Drain Lines allow a tank to be drained without sidewall penetration. This is beneficial in every tank but especially important in double wall tanks.

- Top Drains are available in 2", 3" and 4" sizes.
- Available in PVC, CPVC, PVDF, HDPE and Stainless Steel.
- Top Drains are braced with welded supports.

Our Top Drain Lines can terminate outside the tank with a cam lock fitting, flange or NPT threaded fitting. The flanged and threaded fittings are normally used for pump connections. A flexible connection should be used between the pump and tank.

BAILIFF ENTERPRISES, INC. ◆ 305 E. Rogers Road ◆ Willis, TX 77378
Contact Dan Miller ◆ dmiller@plasticstoragetanks.com